#### **DEVICE SPECIFICATIONS**

# NI PXIe-2737

#### 256-Crosspoint Relay Matrix

This document lists specifications for the NI PXIe-2737 (NI 2737) matrix relay card. All specifications are subject to change without notice. Visit *ni.com/manuals* for the most current specifications.

Topology......2-wire  $4 \times 64$  matrix

#### Contents

About These Specifications	1
Input Characteristics	2
RF Performance Characteristics.	.3
Dynamic Characteristics	4
Physical Characteristics	4
Environment	
Operating Environment	5
Storage Environment	
Shock and Vibration.	
Diagrams	6
Accessories	
Compliance and Certifications	8
Safety	
Electromagnetic Compatibility	8
CE Compliance	9
Online Product Certification.	
Environmental Management	9

# **About These Specifications**

*Specifications* characterize the warranted performance of the instrument under the stated operating conditions.

*Typical Specifications* are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.

All voltages are specified in DC, AC<sub>pk</sub>, or a combination unless otherwise specified.





Caution The protection provided by the NI 2737 can be impaired if it is used in a manner not described in this document.

# Input Characteristics

Maximum switching voltage

Channel-to-channel 100 V 



**Note** This module is rated for Measurement Category I. It is intended to carry signal voltages no greater than 70  $V_{rms}$ , 100  $V_{pk}$ , or 100 VDC. This module can withstand up to 500 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 VAC or 230 VAC.

Measurement Categories CAT I and CAT O (Other) are equivalent and are for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. This category is for measurement of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special hardware, limited-energy parts of hardware, circuits powered by regulated low-voltage sources, and electronics.



**Caution** When hazardous voltages (>42.4 V<sub>pk</sub>/60 VDC) are present on any channel, safety low-voltage (≤42.4 V<sub>nk</sub>/60 VDC) cannot be connected to any other channel



**Caution** The switching power is limited by the maximum switching current, the maximum voltage, and must not exceed 60 W, 62.5 VA.

Maximum current



Note Switching inductive loads (for example, motors and solenoids) can produce high voltage transients in excess of the module's rated voltage. Without additional protection, these transients can interfere with module operation and impact relay life. For more information about transient suppression, visit ni.com/info and enter the Info Code relayflyback.

(channel-to-COM)

DC path resistance

Initial  $<1.3 \Omega$ End-of-life  $>2.3 \Omega$ 

Path resistance is a combination of relay contact resistance and trace resistance. Measure path resistance by combining resistance of the high and low signal paths from one row to one column. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above  $\geq 2.3 \Omega$ .

Thermal EMF.....<10 uV

#### **RF Performance Characteristics**

Bandwidth (-3 dB, typical at 23° C)

1-wire 50  $\Omega$  termination.....  $\leq$  10 MHz 2-wire 100  $\Omega$  termination < 10 MHz

Open channel isolation (typical at 23° C, 50  $\Omega$ termination)

> 10 kHz > 81 dB 100 kHz.....>61 dB 1 MHz....≥41 dB

Channel-to-channel crosstalk (typical at 23° C,  $50 \Omega$  termination)

10 kHz....≤ -67 dB 100 kHz.....<-50 dB 1 MHz....<-32 dB

# **Dynamic Characteristics**

Relay Operate Time	
Typical	1 ms
Maximum	3.3 ms
Simultaneous drive limit	90 relays
Expected mechanical relay life	$1 \times 10^8$ cycles
Expected electrical relay life	
≤30 mV, ≤10 mA resistive	2.5 × $10^6$ cycles
30 V, 1 A	$5 \times 10^5$ cycles
30 V, 2 A	$1 \times 10^5$ cycles
60 VDC, 1 ADC resistive	$1 \times 10^5$ cycles



**Note** Relays are field replaceable. Refer to the NI Switches Help at *ni.com*/ manuals for more information about replacing a failed relay.



Note Certain applications may require additional time for proper settling. Refer to the NI Switches Help at ni.com/manuals for more information about including additional settling time.

# Physical Characteristics

Relay type	Electromechanical, non-latching
Relay contact material	Palladium-ruthenium, gold covered
Front panel connector	160 DIN 41612, 160 positions, male
Power requirement	
PXI Express	
12 V	24 W
3.3 V	3.6 W
Dimensions (L × W × H)	3U, one slot, PXI/cPCI module, PXI Express compatible 21.6 cm $\times$ 2.0 cm $\times$ 13.0 cm (8.5 in. $\times$ 0.8 in. $\times$ 5.1 in.)
Weight	423 g (14.9 oz)

# **Environment**

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient
	temperature)
Pollution Degree	2
Indoor use only.	

## Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with
	IEC 60068-2-1 and IEC 60068-2-2. Meets
	MIL-PRF-28800F Class 3 low temperature
	limit and MIL-PRF-28800F Class 2 high
	temperature limit.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

# Storage Environment

Ambient temperature range	40 °C to 71 °C (Tested in accordance
	with IEC 60068-2-1 and IEC 60068-2-2. Meets
	MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in
	accordance with IEC 60068-2-56.)


## Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in
	accordance with IEC 60068-2-27. Meets
	MIL-PRF-28800F Class 2 limits.)
Random vibration	
Operating	5 Hz to 500 Hz, 0.3 g <sub>rms</sub>
Nonoperating	5 Hz to 500 Hz, 2.4 g <sub>rms</sub> (Tested in accordance
	with IEC 60068-2-64. Nonoperating test
	profile exceeds the requirements of
	MIL-PRF-28800F, Class 3.)


# Diagrams

The following figure shows the NI 2737 power-on state.

Figure 1. NI 2737 Power-On State

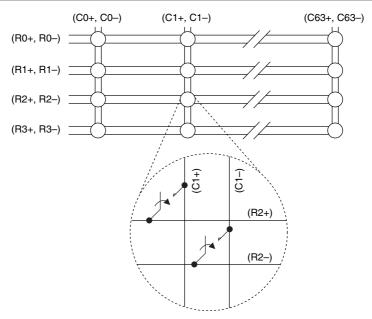

The following figure shows the NI 2737 connector pinout.

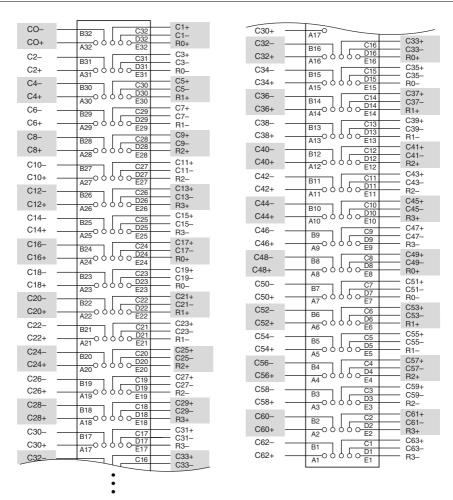

#### Accessories

Table 1. NI Accessories for the NI 2737

Accessory	Part Number
DIN160 to 50-pin D-SUB switch cable, 1 m	782417-03
DIN160 to DIN160 switch cable, 1 m	782417-02

Table 1. NI Accessories for the NI 2737 (Continued)

Accessory	Part Number
DIN160 to bare wire switch cable, 1 m	782417-01
Relay replacement kit for IM02PNS Relays	781089-10

# Compliance and Certifications

#### Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1. EN 61010-1
- UL 61010-1, CSA 61010-1



**Note** For UL and other safety certifications, refer to the product label or the *Online* Product Certification section.

#### Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



**Note** In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



**Note** Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



**Note** For EMC declarations, certifications, and additional information, refer to the Online Product Certification section.

# CE Compliance ( €

This product meets the essential requirements of applicable European Directives, as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

#### Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/ certification, search by model number or product line, and click the appropriate link in the Certification column.

#### **Environmental Management**

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the Minimize Our Environmental Impact web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

#### Waste Electrical and Electronic Equipment (WEEE)



**EU Customers** At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

#### 电子信息产品污染控制管理办法(中国 RoHS)

中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物 质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息,请登录 ni.com/environment/rohs china。 (For information about China RoHS compliance, go to ni.com/environment/rohs china.)

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: Help»Patents in your software, the patents.txt file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readmer file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.