

## MMCX Plug to SMB Plug Cable RG-316 Coax and RoHS

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		2	GHz
VSWR			1.35:1	
Velocity of Propagation		70		%
Capacitance		32 [104.99]		pF/ft [pF/m]

### Mechanical Specifications

#### Cable Assembly

Weight

0.00661 lbs [3 g]

#### Cable

Cable Type

RG-316

Impedance

50 Ohms

Inner Conductor Type

Stranded

Inner Conductor Material and Plating

Copper, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Silver Plated Copper Braid

Jacket Material

FEP, Tan

Jacket Diameter

0.098 in [2.49 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug	SMB Plug
Polarity	Standard	Standard
Impedance	50 Ohms	50 Ohms
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Spec.	30μ in. minimum	30μ in. minimum
Dielectric Type	PTFE	PTFE
Body Material & Plating	Brass, Gold	Brass, Gold
Body Plating Spec.	3μ in. minimum	3μ in. minimum

### Environmental Specifications

#### Temperature

Operating Range

-65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:




### Configuration:

- MMCX Plug
- SMB Plug
- RG-316

Fairview Microwave  
1130 Junction Dr. #100  
Allen, TX 75013  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

## Typical Performance Data

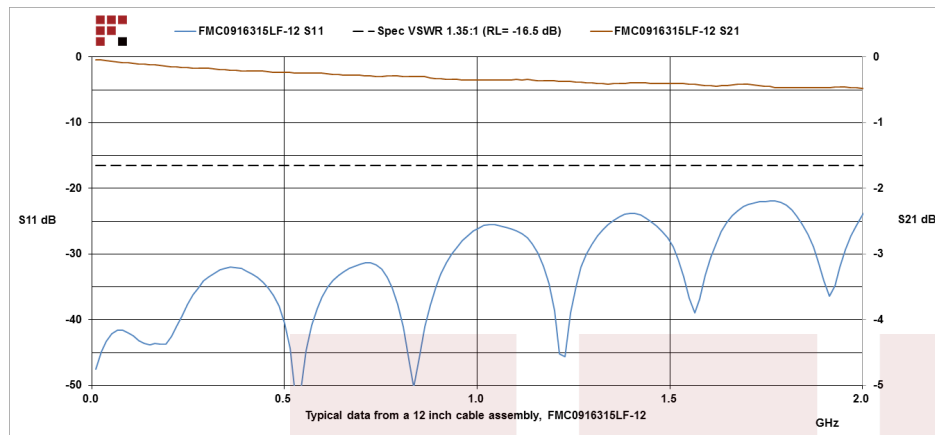

## How to Order

Part Number Configuration:

**FMC0916315LF - xx uu**

cm = Centimeters  
<blank> = Inches  
Length


Example: FMC0916315LF-12 = 12 inches long cable  
FMC0916315LF-100cm = 100 cm long cable

MMCX Plug to SMB Plug Cable RG-316 Coax and RoHS from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: [MMCX Plug to SMB Plug Cable RG-316 Coax and RoHS FMC0916315LF](#)

URL: <https://www.fairviewmicrowave.com/standard-mmcx-plug-smb-plug-cable-rg316-coax-fmc0916315lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

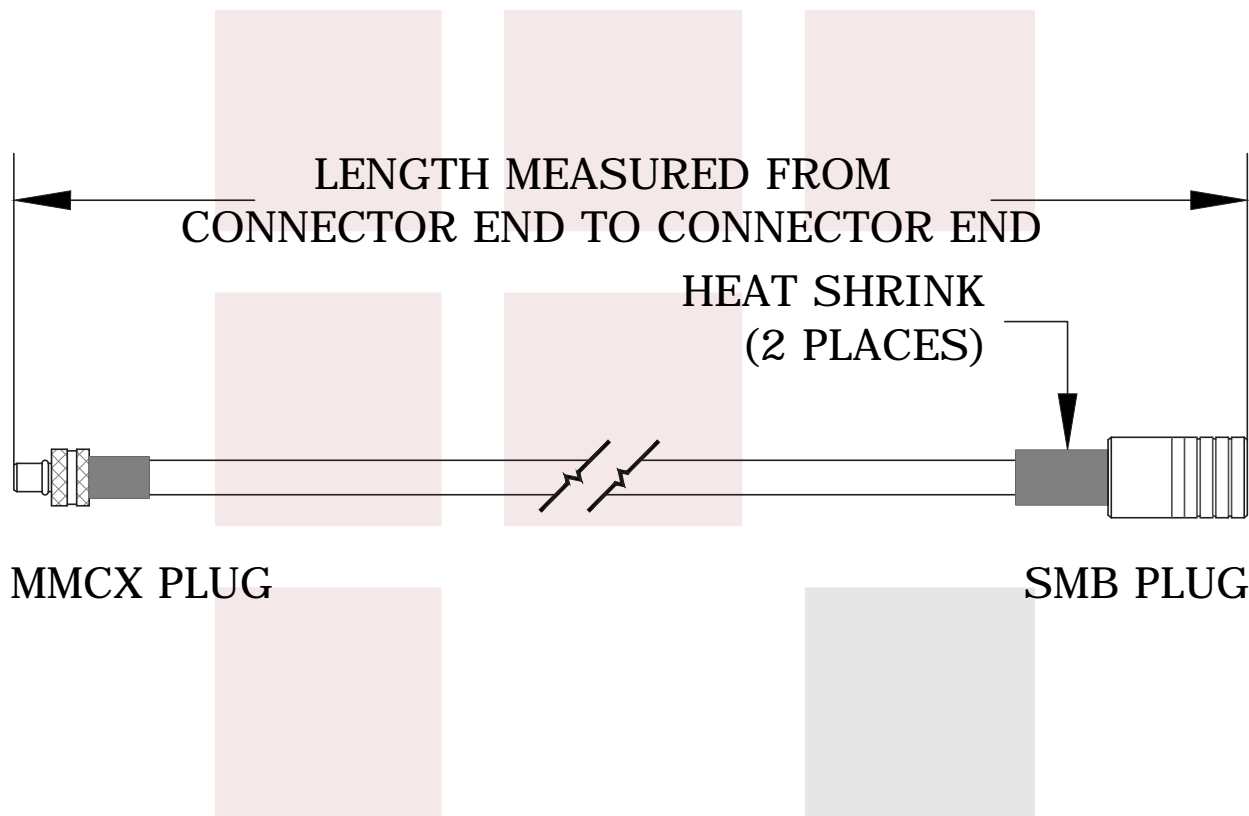

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE MMCX Plug to SMB Plug Cable RG-316 Coax and RoHS		DWG NO FMC0916315LF		CAGE CODE 3FKR5	
CAD FILE 102814		SHEET		SCALE N/A	SIZE A 5568