




Cordless Circular Saw DHS661/ DHS660 165 mm (6-1/2")



Photo : DHS661

Compact and Lightweight

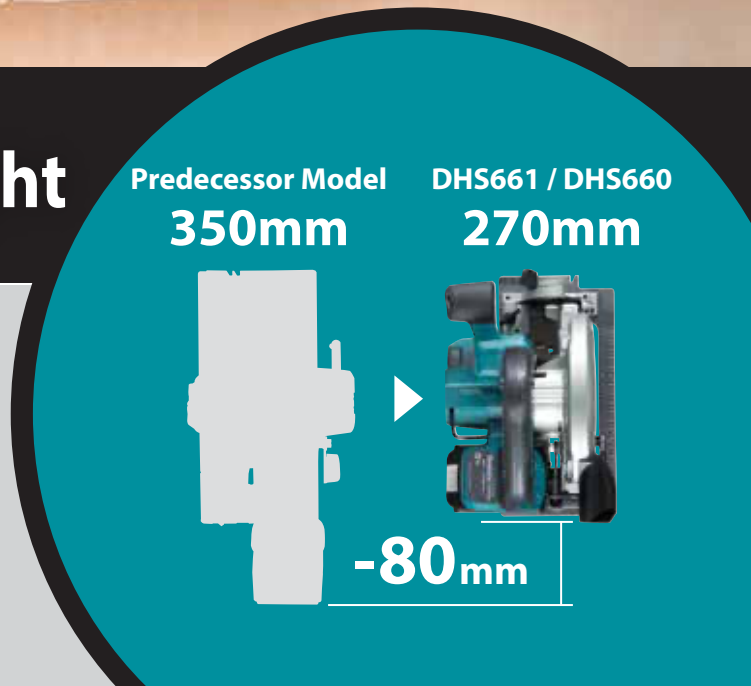

Predecessor Model
350mm

DHS661 / DHS660
270mm

-80mm

Compact with Only 270 mm (10-5/8") Length for Better Maneuverability

Net weight

2.9kg

with BL1815N

BL MOTOR

Optional dust nozzle

is attachable for connecting to vacuum cleaner.



Rear dust exhaust port



Work amount

Test material:
SPF of 2 x 10 (38mm x 235mm)
Bevel angle: 0°
Battery: BL1850B
(on a single full battery charge)

200 cuts

Twin LED Job light



Blower function



Flat motor housing design

Increases stability when changing blades.




Bevel cuts up to 50 degrees



ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

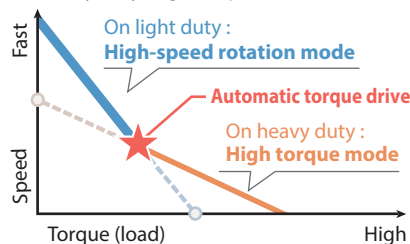

AWS Auto-start Wireless System (DHS661 only)

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Wireless unit is compatible with all supported tools

Bluetooth AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

Accessories

Specialized EFFICUT blade



Size (mm)	Part No.
165 x 1.4 x 20 x 25T	B-62979
165 x 1.45 x 20 x 56T	B-57364

Guide rail adapter set

Part No.
199232-5



Tool hanger

Part No.
199231-7



Cordless Circular Saw

DHS661RFJ/DHS661Z / DHS660RFJ/DHS660Z

Brake	Blade Diameter 165 mm (6-1/2") 15.88 / 20 mm (5/8" / 13/16")
Soft Start	Hole Diameter 90°: 57 mm (2-1/4"), 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
Dust Collection	Max Cutting Capacity 90°: 57 mm (2-1/4"), 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
Built-in Job Light	No Load Speed (RPM) 5,000
Carrying Case	Vibration Level Cutting Wood: 2.5 m/s ² or less
	Sound Pressure Level 93 dB(A)
	Sound Power Level 104 dB(A)
	Dimensions (L x W x H) 270x186x250 mm
	Net weight DHS661 : 2.9 - 3.2 kg DHS660 : 2.9 - 3.2 kg

DHS661RFJ/DHS660RFJ: 2 battery BL1830B set, DC18RC fast charger (connector plastic case (type3)(821551-8))

DHS661Z/DHS660Z: No battery, charger

Standard Equipment : DHS661/DHS660: hex. Wrench 5 (783203-8), TCT blade 165x25t wood Efficut (B-63018), guide rule (164095-8), dust nozzle set (199230-9).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 06, Block 16, 18L1-2 Đường số 3, KCN VSIP II, P. Hòa Phú, TP. Thủ Dầu Một, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, số 1, đường số 6, KCN - ĐT - DV VSIP Bắc Ninh, X. Phù Chấn, T.X Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG

Số 15, Phố Phạm Hồng Thái, Quận Hồng Bàng, Thành phố Hải Phòng
Điện thoại: 0225 8831 529

TRUNG TÂM DVKH CHI NHÁNH ĐÀ NẴNG

102 Đ. Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5079/ 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DVKH CHI NHÁNH NHA TRANG

1053 Đ. 2/4, P. Vạn Thạnh, TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 3823 338

TRUNG TÂM DVKH CHI NHÁNH BUÔN MA THUỘT

60 Đ. Y Jút, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DVKH CHI NHÁNH CẦN THƠ

226 Đ. Võ Văn Kiệt, P. An Thới, Q. Bình Thủy, TP. Cần Thơ
ĐT: 0292-3894358 Fax: 0292-3894359