


Transportation Vvibration Measuring Instruments ISTA 1A Packaging Testing

Equipment





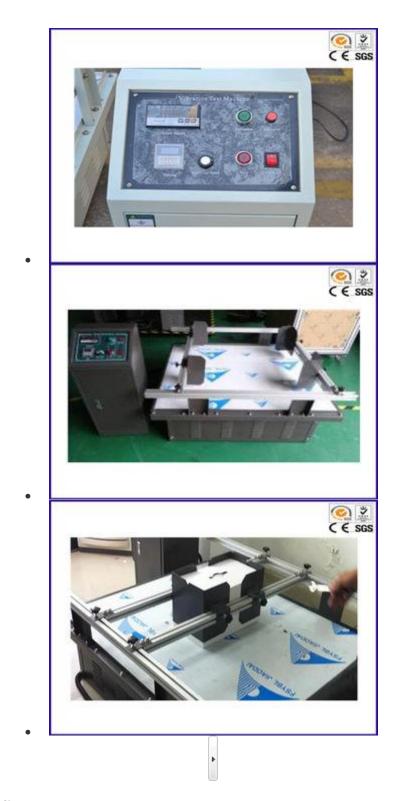

Product Details:

Place of Origin: China

Brand Name: YUYANG

Certification: GB/T4857.2;EN71 ANSI ULISO2247 ASTM999 ISTA 1A

Model Number: YY1401

Payment & Shipping Terms:

Minimum Order Quantity: 1 set

• Price: Negotiation

Packaging Details: Plywood Case

• Delivery Time: 5-8 work days

Payment Terms: T/T L/C Western Union

Supply Ability: 5 sets per month

Share to :

Simulation Transportation Vibration Package Testing Equipment ISTA 1A

Description:

Transport vibration test equipment is used to check all kinds of specific load products to bear actual road condition ability during auto transportation process, simulate the effect on products according to the actual working condition in the lab, basing on this, access or confirm the products package.

Features:

- 1. Precise design and manufacture, beautiful out appearance, serious silent working;
- 2. Outer use stainless steel plate bear table to make it use without rust for a long time;
- 3. The around plate and control cabinet are use cold-roll steel plate baking finish;
- 4. The pedestal of machine is use heave steel channel with damping device, low working noise;
- 5. The pedestal equip with fixed hole site, it can be positioned the machine by anchoring when at installation site;
- 6. Adjustable material fixed grip, can meet with difference sizes of products testing
- 7. Use special cam mechanism to imitate horse racing type vibration;
- 8. Synchronization noise belt transmission, low working noise;

9. The control cabinet and testing table are separated type

Application:

Transport vibration test equipment is used in toy, electronic, furniture, gift, ceramics, package and other products.

Standards:

The machine was designed according to GB/T4857.2; EN71, ANSI, UL, ISO2247, ASTM999, ISTA 1A standards of international transport.

Advantage:

- (1) CE certifiate
- (2) 15-30days fast delivery
- (3) 12month warranty
- (4) High precise instrument with imported brand parts
- (5) Strong export standard plywood case

Specifications:

HH 1301 Simulation Transportation Vibration Package Testing Machine	
Max. Test Load	100 Kg
Frequency Range	60-300 rpm
Amplitude Range	25.4 mm (1 inch)
Vibration Mode	Roundtrip
Simulation Speed	25~40 km/h
Woke Table Size	1000×1200 mm
Outside Dimension (L×W×H)	1255×1070×660 mm
Power Capacity	1 HP
Weight	125 Kg
Environmental Conditions	Temperature: 5~40°c; Related Humidity: <85%

Speed Mode	DC converter or AC Frequency Control
Power	220V, 50 Hz



