

XIAMEN TOB NEW ENERGY TECHNOLOGY CO., LTD. Provide A Full Set Of Solutions For Battery Machines. SALES tob.amy@tobmachine.com TECH SUPPORT +86-18120715609

Search...

Q

English -



Battery Sealing Machine For Pouch

Top-Side Sealing

- TOB-JD-TSS-300 Battery Sealing Machine is a compact heating sealer for sealing aluminum-laminated films during pouch cell (polymer Li-Ion cell) case preparation with 300mm length sealing bar.
- Item No.:TOB-JD-TSS-300
- Order(Moq):1set
- Payment:L/C,T/T,Western Union, Paypal
- Product Origin:China
- Shipping Port:XIAMEN
- Lead Time:7days

Product Detail

Lithium Battery Sealing Machine Used For Pouch/Case Top and Side Heating Sealing Adopts Soft Sealing Method


1 TOB-JD-TSS-300Battery Sealing Machineis a compact heating sealer for sealing aluminum-laminated films during pouch cell (polymer Li-lon cell) case preparation with 300mm length sealing bar.

2 The Battery Sealing Machineadopts soft sealing bar, The sealing is copper in bottom and aluminum and Silicone rubber piece on top. So it can be used for both top and side sealing for pouch cell.


3 It can prepare the pouch cell for the injection of electrolyte by sealing the side and top of the pouch cell with tab.

4 The sealing bar can be customized according to requirement, Sealing head length 200-400 mm customized, and we can also put different sealing width in one sealing head.

Model	Battery Sealing Machine TOB-JD-TSS-300
Source voltage	AC110V-240V, Customized
Heating pipe power	1000W
Warranty	One Year limited warranty with lifetime support
Max sealing length	300mm
Sealing time	0-99s can be set
Sealing time accuracy	±0.1s
Sealing temperature	0-250°C
Temperature control accuracy	±2°C
Parallelism of upper and lower	0.01mm
sealing head	
Sealing stamp width	6mm(customized)
Sealing stamp thickness	0.19-0.3mm
Dimension	355*470*540mm
Weight	73kg
Shipping weight	90kg
Shipping dimension	45*57*74cm

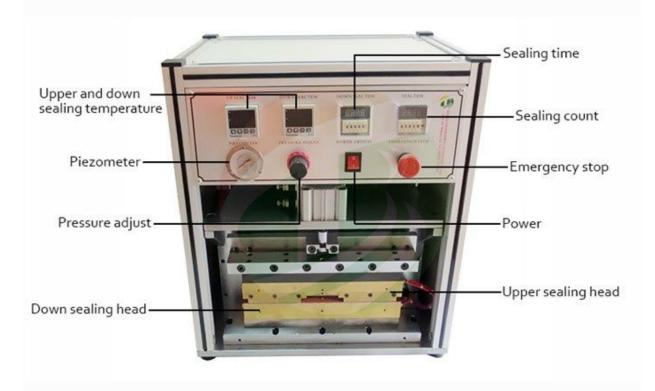

Battery sealing machine accessories - Heating tube, Relay, And Aluminum and Silicone plate

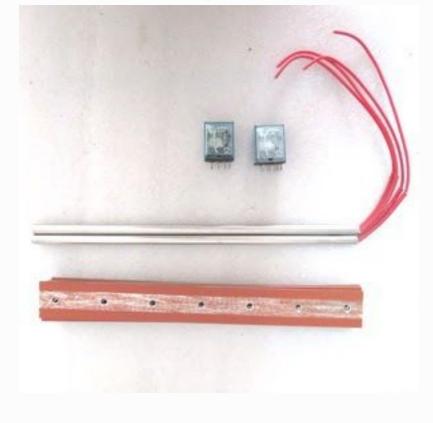

English panel for battery sealing machine



Explain for soft sealing method

					The second second		
	0	•	-	-	-	-	
	U			100		U.	
			1		1000		
+			-		1		
Copper			White is Al	uminum plate	Red is S	ilicone plate	