

AGF800-28 Series

800 Watts

Data Sheet

Total Power: 800 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Extra wide trim range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium substrate
- Functions
- Power good
- Auxiliary power rail

SAFETY

- UL/CSA 62368-1
- IEC62368-1



Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency ²	94.5%
Output	
Voltage tolerance	+/-1%
Line regulation	+/- 0.2%
Load regulation	+/- 0.5%
Noise/ripple	250 mV
Overvoltage protection	Hiccup
Overtemperature protection	Auto restart
Switching frequency	320 KHz
Temperature co-efficient	±0.02/°C
Isolation	
I/O isolation	1500 VDC min.

Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS compliant	

Ordering Information


Model number	Input voltage	Output voltage	Power
AGF800-48S28-6L	36 - 75 Vin	28 V @ 28.6 A	800 W

Standard version is negative enable

"-6" = 3.8 mm pin length

"-L" = RoHS 6 compliance

Mechanical Drawings

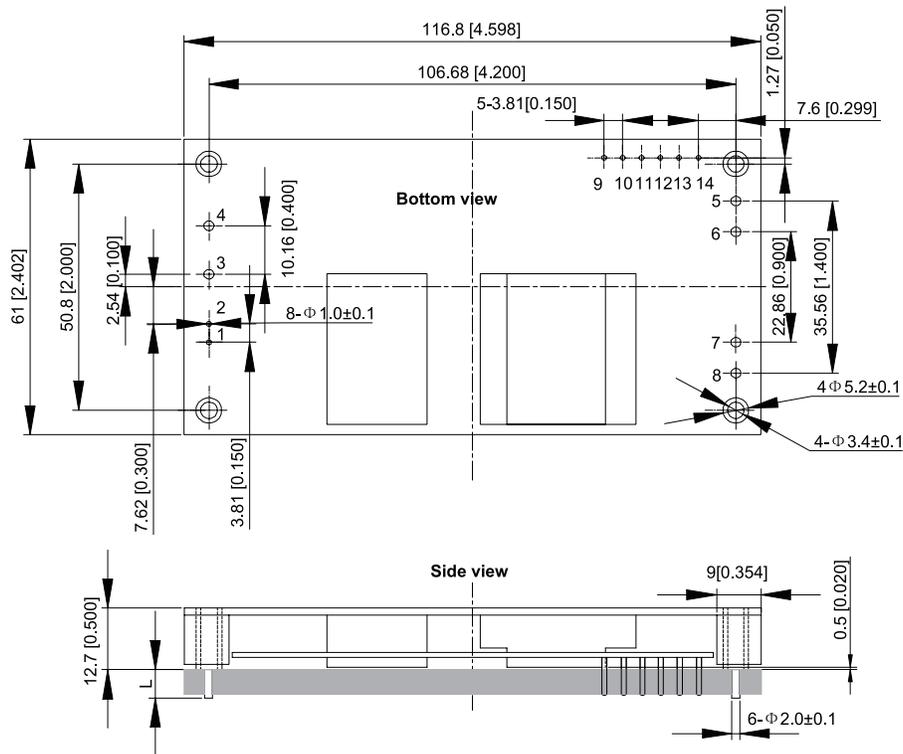

Unit: mm[inch]

Bottom view: pin on upside

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]

X.XXmm±0.25mm[X.XX in.±0.01in.]

Pin Assignments

Pin #	Function
1	+On/Off
2	-On/Off
3	Vin+
4	Vin-
5,6	Vo-
7,8	Vo+
9	AUX
10	I/OG
11	
12	Trim
13	+S
14	-S

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN™
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2020 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com