
AUTO FOCUS DIGITAL MICROSCOPE (WITH DISPLAY) CODE 5303-AF103







0.5X camera adapter (included)

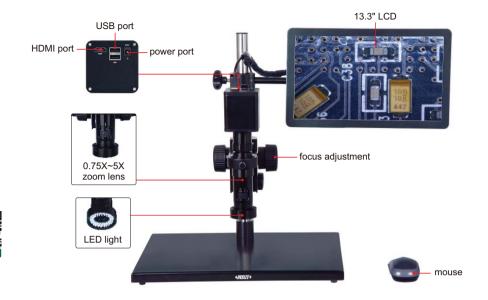

1X auxiliary objective (included)





16G USB flash disk (included)



2X auxiliary objective (optional)

■ 1080P high-definition image

- Auto focus camera
- Take pictures and videos, saved to USB flash disk
- Picture review, picture compare
- Automatic exposure and white balance
- Brightness, contrast ratio, gain are adjustable
- Display cross hair (blue/green/red/yellow/black/ brown colors)



SPECIFICATION

J. 2011 107 (1101)		
Magnification	20X~123X	
Sensor	1/2.8" CMOS	
Pixel	2M	
Resolution	1920×1080	
Frame rate	60fps	
Output	HDMI	
Power supply	power adapter	
Dimension (L×W×H)	570×300×430mm	
Weight	6.5kg	

STANDARD DELIVERY

Main unit	1 pc
0.5X camera adapter	1 pc
1X auxiliary objective	1 pc
16G USB flash disk	1 pc
White/black plate	1 pc
Mouse	1 pc
HDMI cable	1 pc
Power adpter	2 pcs



display cross hair (blue/green/red/yellow/ black/brown colors)



1X camera adapter (optional)

MAGNIFICATION, FOCUS DISTANCE AND VIEW FIELD

Auxiliary	Specification	Camera adapter		
objective	Specification	0.5X (included)	1X (optional)	
1X (included) Magnification Focus distance View field	Magnification	20~123X	40~246X	
	Focus distance	48~84mm	48~84mm	
	View field	13×7~2.2×1mm	6.3×3.5~1.1×0.5mm	
	Magnification	40~246X	80~492X	
2X (optional)	Focus distance	24~42mm	24~42mm	
	View field	6.5×3.5~1.1×0.5mm	3.3×1.8~0.6×0.3mm	

AUTO FOCUS DISTANCE

Zoom objective scale	0.75X	1X	1.5X	2X	2.5X
Auto focus distance	48~84mm	50~78mm	55~73mm	62~71mm	65~70mm
Zoom objective scale	3X	3.5X	4X	4.5X	5X
Auto focus distance	66~70mm	67~70mm	68~70mm	68~70mm	68~70mm

OPTIONAL ACCESSORY

1X camera adapter	ISM-DL-CA1X
2X auxiliary objective	ISM-DL-OB2X
X-Y glass stage (travel: 74×60mm)	ISM-DL-STAGE
X-Y metal stage	ISM-DL-STAGE1
LED auxiliary lighting	ISM-DL-LED
Lens with coaxial light	ISM-DL-COAXIAL
Auxiliary objective	Page 276