

# DAEHAN SENSOR



Digital Liquid Indicate  
with level controller

DLC – Series

Level Indicator with Relay Output

Product Name

DLC – 4U



ISO 9001 인증업체

1993 DAEHAN SENSOR CO., LTD.  
All rights reserved

# Table of Contents

1. Introduction .....	3
2. Specification .....	3
3. Dimensiosns .....	4
4. Wiring Connection .....	5
5. Display Operation .....	6
6. Check Point Before A/S .....	10

## SPECIFICATIONS

### Introduction

This DLC-4U Series Level Controller gets signal from each point of the sensor installed in the tank and displays the level of the liquid in the tank as points.

LED display enables you to read the current status correctly and easily.

This is designed to control two alarms and one of control which activates the connected pump.

In the mode of supply, if it does not stop at the HIGH set-point, HIGH alarm turns on.


If it does not stop at the LOW set-point, LOW alarm turns on.

You can choose a mode of supply or drainage.



### Specification

- ▶ Power Supply ..... AC110V / 220V  $\pm 10\%$ , 50/60Hz
- ▶ Operating Temperature ..... 0°C ~ 60°C
- ▶ Dimensions ..... 87mm (Wide) x 155mm (High) x 69mm (Deep)
- ▶ Material ..... Polycarbonate & A.B.S
- ▶ Max. Switching Current Capacitor ..... 1250VA, 150W
- ▶ Max. Switching Voltage ..... 250VDC, 30VDC
- ▶ Max. Switching Current ..... 5A

Dimensions




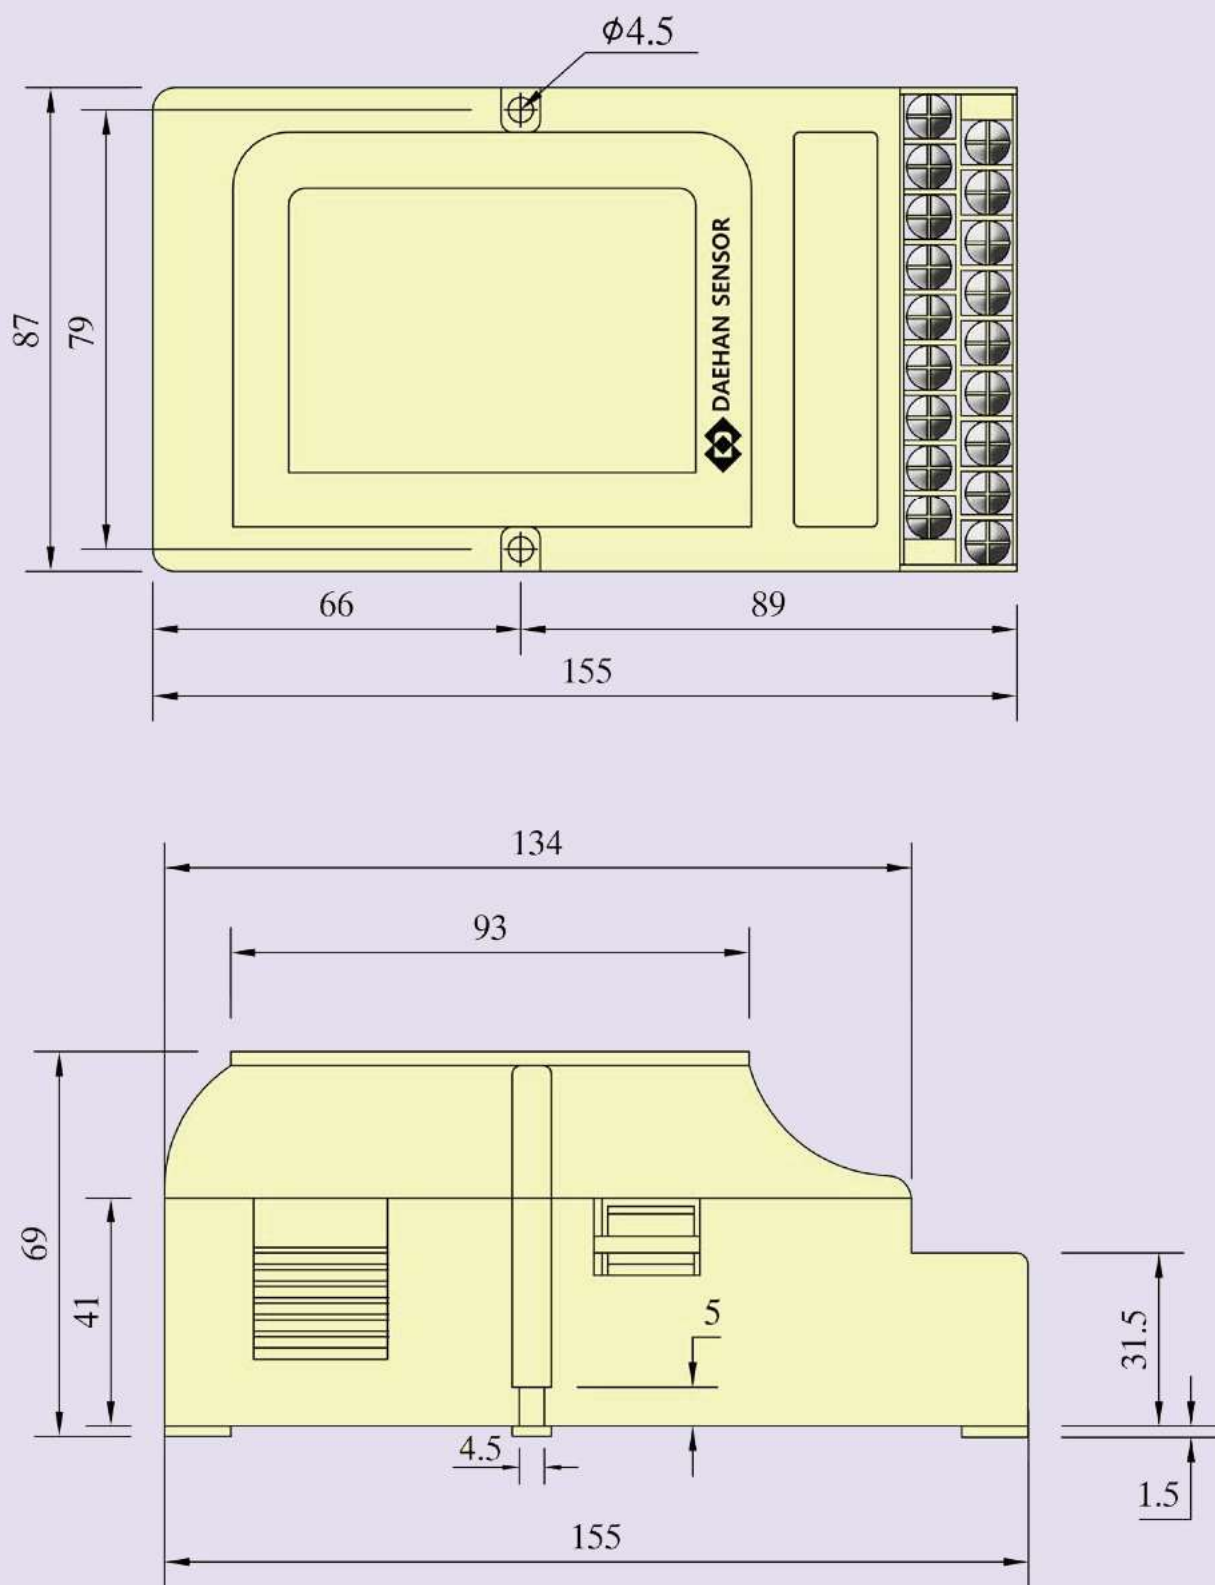


## Wiring Connection

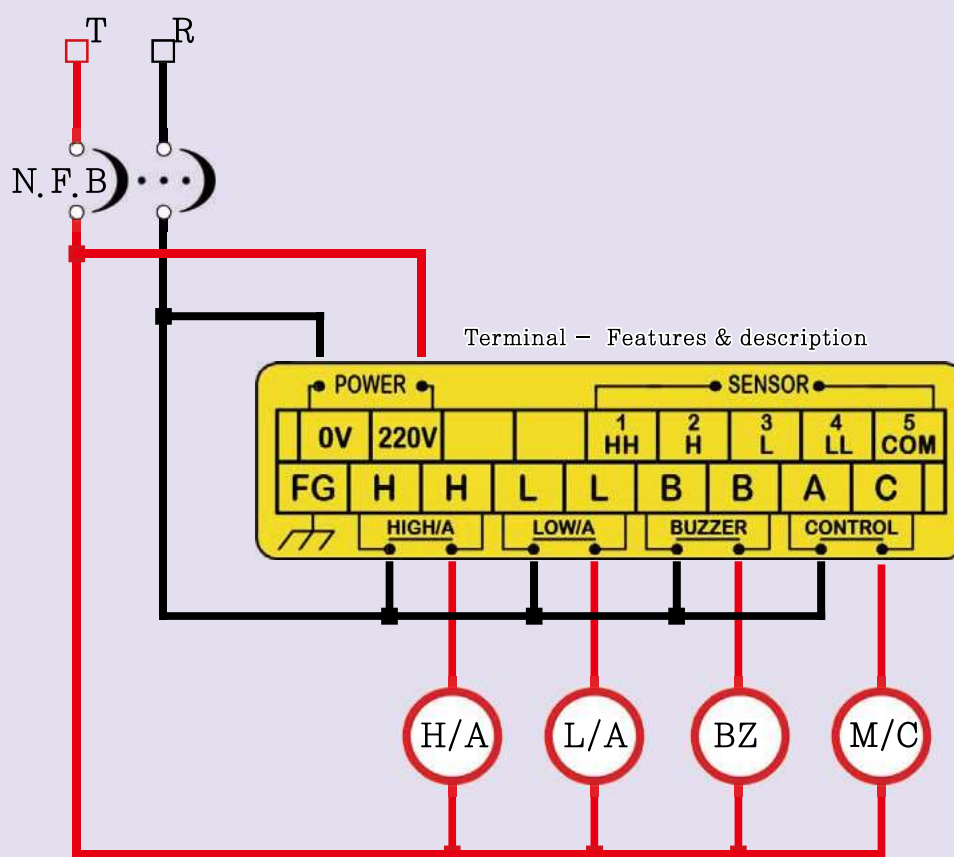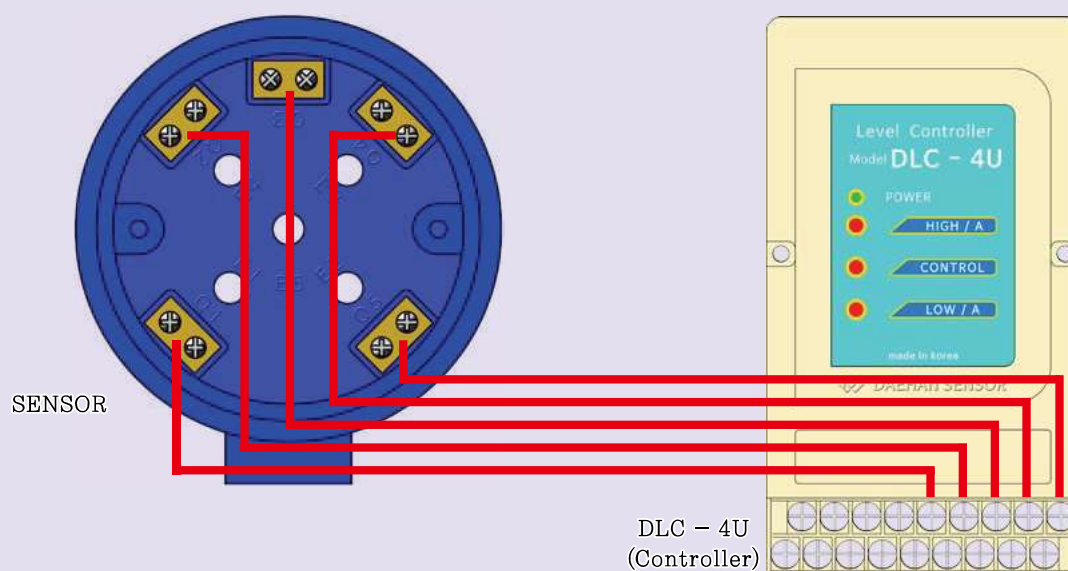


# Wiring Connection

## Supply / Drain Selection

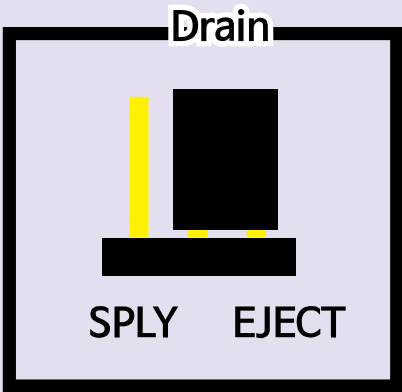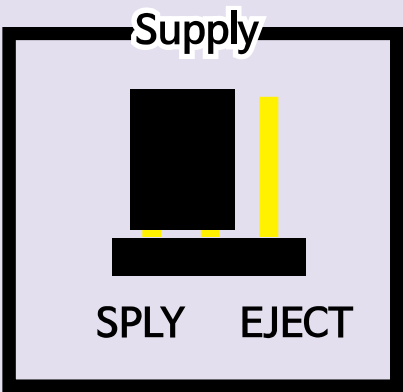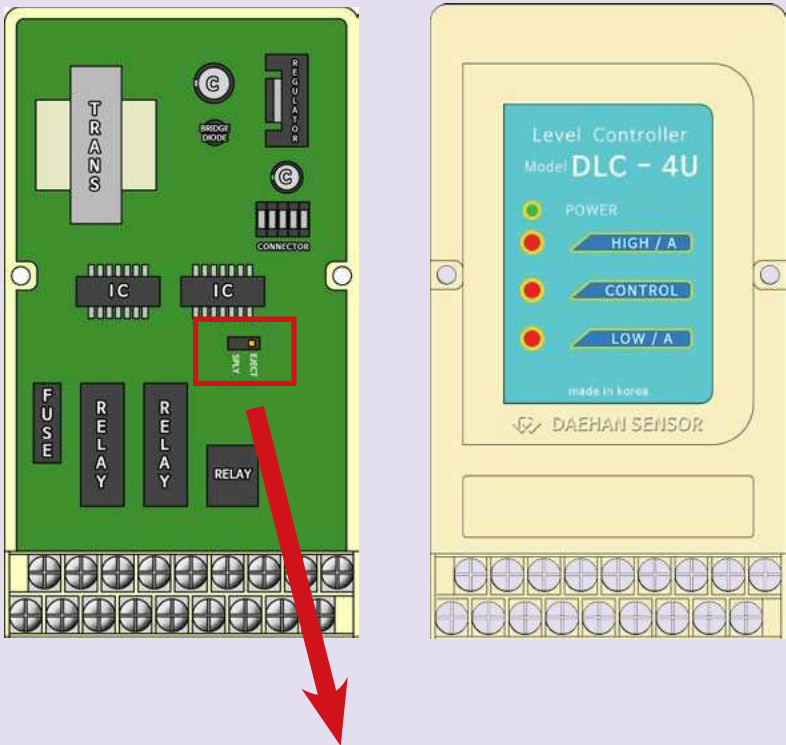

# Display Operation


## 1. Low Level Display

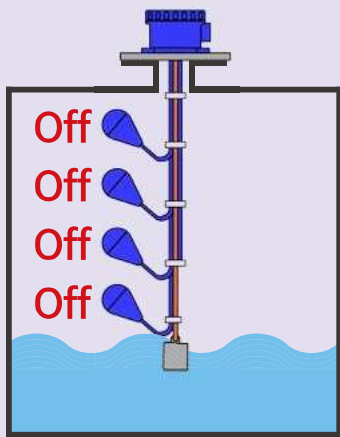

When the liquid level goes Down to reach the LOW/A point, the LOW/A indicator turns on. At the same time, the LOW/A contact signal activates the connected buzzer and pump.



## 2. High Level Display

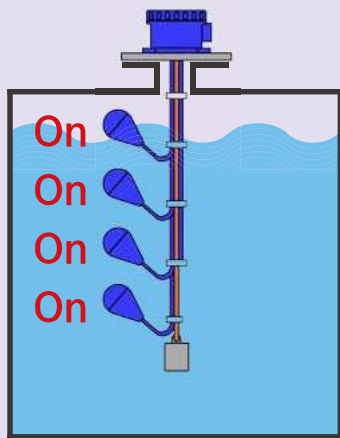


When the liquid level goes Up to reach the HIGH/A point, the HIGH/A indicator turns on. At the same time, the HIGH/A contact signal activates the connected buzzer and pump.



# Display Operation


## 1. Supply Control "On" Level Display

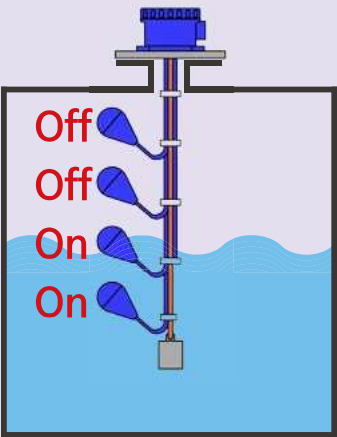

When the liquid level goes Down to reach the START point, the Control indicator turns on. At the same time, the Control contact signal activates the connected pump.



## 2. Supply Control "Off" Level Display

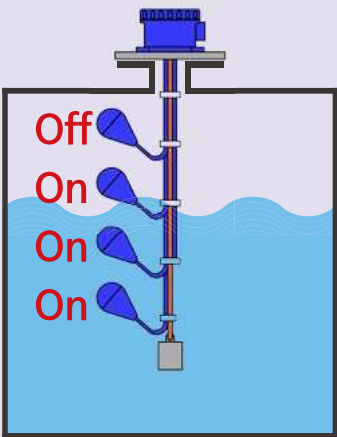


When the liquid level goes up to reach the STOP point, the Control indicator turns off. At the same time, the CONTROL contact signal is not out and deactivates the connected pump.





# Display Operation


## 1. Drain Control "On" Level Display

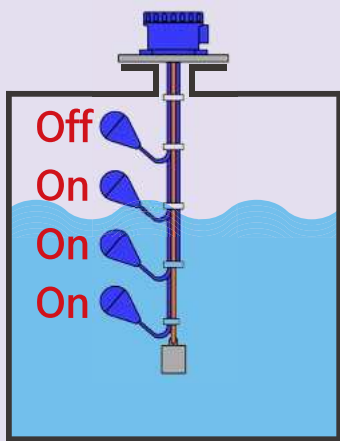

When the liquid level goes Up to reach the START point, the Control indicator turns on. At the same time, the Control contact signal activates the connected pump.



## 2. Drain Control "Off" Level Display

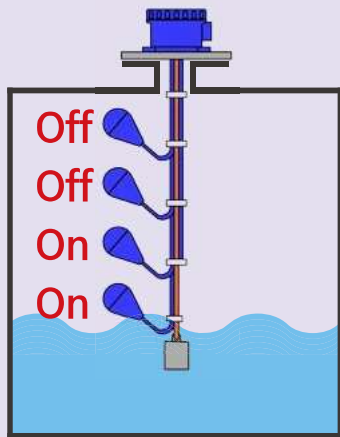

When the liquid level goes Down to reach the STOP point, the Control indicator turns off. At the same time, the CONTROL contact signal is not out and deactivates the connected pump.



## Check & A/S

If you find any abnormal system during operation, please try to check below points.

1. Is the power connected to AC110V or AC220V correctly?
2. Is the wiring to the sensor made correctly?
3. Is the contact with the relay built up through correct sequence?
4. Is the current input from the sensor correct?
5. Is there any malfunction around the unit?

If the trouble still exists, please kindly contact below.

\* Installation and operation manual is subject to change without prior notice for quality improvement.

Head Office  
94-2, Yongdap-dong, Seongdong-gu, Seoul, Korea

R&D Office  
2-71, Jeonong-dong, Dongdaemun-gu, Seoul, Korea

Tel : 02-2213-9888(代) Fax : 02-2245-3482  
e.mail : master@dh34.com Domain : www.dh34.com