

ICI Pilling And Snagging Tester GT-C18



Application:

ICI Pilling and Snagging Tester, used to determine the surface pilling and snagging properties of both woven and knitted materials.

ICI Pilling Box Tester Standards:

GB/T4802.3, ISO 12945.1, BS5811, IWS TM152


Feature of ICI pilling tester

- Simplified designing, more convenient to operate, and easy to maintain.
- Synchronous speed motor drives the test boxes, ensuring constant speed of rotation.



Dimensions of ICI pilling tester

External Dimension:
120*50*50 mm(L*W*H)
Package Dimension:
130*60*60 mm(L*W*H)
Gross Weight:
60KG
Net Weight:
40KG

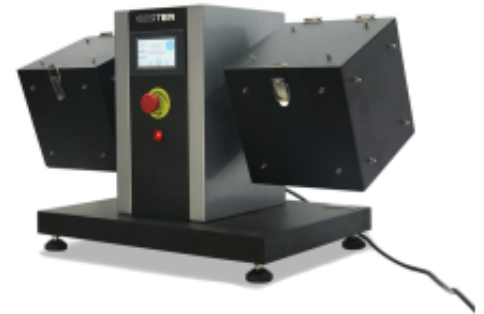

Key Specifications of ICI pilling tester

Number of pilling boxes	2 Boxes	4 Boxes	9 Boxes
Rotational speed	60±2 rpm		
Internal dimensions	235×235mm		
Count range	0-99999		
Polyurethane sample tubes	External dial.: 31.5±1mm; L:140±1mm; thickness: 3.2±0.5mm;		
Power supply	AC 220V 50/60HZ		
Dimensions (L x W x H)	120x 50x 50 cm	120x 50x80 cm	140x 50x 160 cm
Weight	40kg	60kg	180kg

Standard accessories	6pcs /each box	Cork lining
	4pcs /each box	Polyurethane sample tubes
	1pc	Sample template
	1pc	Power line
Optional accessories	Optional	Pilling specimen mounting device
	Optional	Standard photographs
	Optional	GT-C78 Pilling Assessment Box
	Optional	M&S Random Tumble Pilling/ Snagging Drum complete with Liner, Step, and 8 polyurethane sample mounting tubes with locking rings - M&S suppliers only.